Yolco™
www.yolco.pl

Anytime.
Anywhere.
Cool.



WATER TANK WITH SHOWER

WTP30

USER MANUAL

1. Explanation of symbols.



Before using the appliance, read the owner's manual first.



Tips and supplementary information



Important operation and maintenance information. Non-compliance may result in a threat to life, health or property damage.



Before using the product, carefully read this instruction manual. Keep this manual for future reference. The manufacturer shall not be held liable for any damage resulting from use inconsistent with the intended purpose or from improper operation.
The warnings and important safety information contained in this manual do not cover all possible conditions and situations that may occur. The user is responsible for exercising caution and common sense when operating and maintaining the product.

Warranty claims should be registered at: pomoc@yolco.pl
When contacting an authorized service center, please have the following information ready: model details and serial number.

The contents of this instruction manual are subject to change without prior notice. The latest version is always available at: www.yolco.pl

2. Safety information



• The equipment is intended for recreational use only.

• The equipment is not intended for the storage of drinking water.

• This equipment may be used by children aged 8 years and above and by persons with reduced physical or mental capabilities, or lack of experience and knowledge, provided they are supervised or instructed on how to use the equipment safely and understand the hazards involved. Children must not play with the equipment. Cleaning and maintenance must not be carried out by children without supervision.

• Do not use the equipment or its power cable if they show signs of damage. If the equipment or its power cable requires repair, contact the manufacturer, an authorized service center, or another qualified professional. Attempting repairs yourself may result in serious danger to health or life.

• Installation of the product must be carried out in accordance with the instructions. Incorrect installation may result in personal injury or property damage.

• Installation is permitted only on vehicle roof racks or similar installations with crossbar dimensions compliant with the technical specifications. Vertical installation of the product is not recommended.

• Before each trip and after driving on uneven terrain, check that the product is securely mounted. Loosened mounting may cause uncontrolled movement of the tank while driving, posing a hazard to road users.

• Do not exceed the maximum permissible load of the roof rack and the vehicle roof. A full tank increases the vehicle’s weight and affects its center of gravity.

• The equipment’s power supply is intended solely for generating water pressure. Connect the equipment only to an extra low voltage power source that complies with the specifications in the technical data sheet, and use only the supplied power cable. Using a power source with incorrect voltage may damage the equipment or pose a fire hazard.

2. Safety information cont.



• Disconnect the product from the power supply after each use and before cleaning or maintenance. Do not unplug the device by pulling on the power cable, as this may damage it.

• The product may only be used while the vehicle is stationary. Do not leave the shower hose connected while driving. Before each trip, disconnect the hose and drain any remaining water.

• Do not use or store the product near open flames or other heat sources.

• The product has an IPX4 ingress protection rating, providing protection against splashing water from any direction. Do not immerse the product in water and do not clean it with a pressure washer. Remove the product before using an automatic car wash. Failure to comply may result in damage to the product, the vehicle, or the car wash mechanism.

• The use of a high-pressure water stream near the face or other sensitive body parts is not recommended.

• The water in the product’s tank may reach temperatures of up to 60°C. Always carefully check the water temperature before use.

• Use of the product at ambient temperatures of 0°C or below is not recommended. Frozen water inside the product may cause damage.

• Modifications to the product’s design, power section, or other components of the set are strictly prohibited.

3. Package contents




• Water tank
• 12V power cord
• Shower head
• Shower hoose
• Mounting kit
• Sealing tape
• User manual

4. Installation and operation

4.1 Installation on a vehicle roof rack

Note! Rinse the inside of the water tank with clean water before beginning installation.

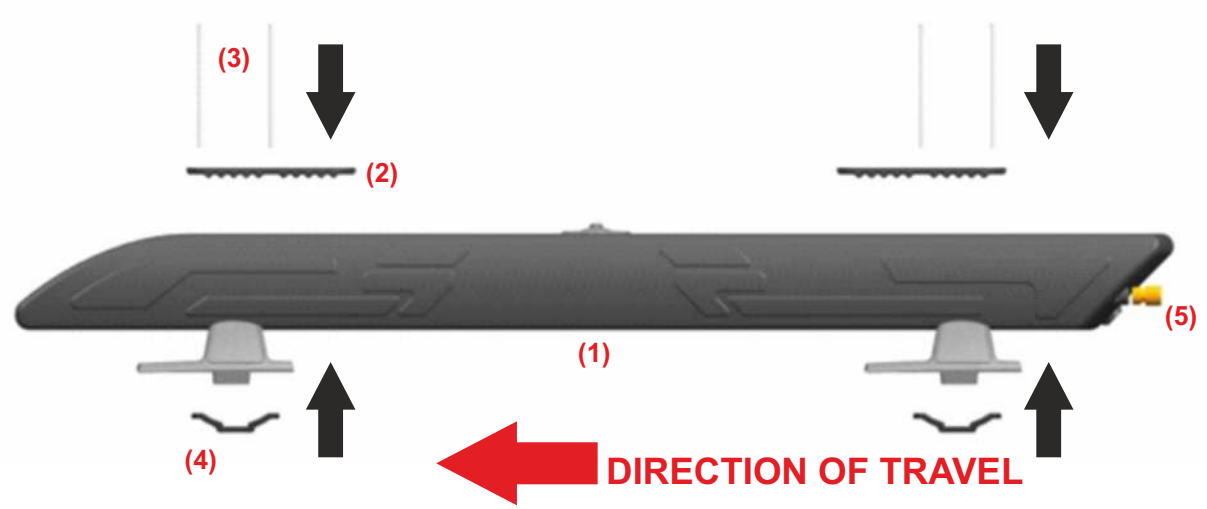


1. Place the tank (1) on the crossbars of the vehicle's roof rack. The tank's power section should be oriented toward the rear of the vehicle.


2. Insert the upper clamp (2) and two mounting screws (3) into each of the tank's mounting holes. The positioning of the clamps and screws should correspond to the layout and width of the roof rack crossbars.

3. Secure the tank by screwing the mounting screws into the lower clamp (4). Use the supplied wrench for this purpose.

4. Ensure that all screws are tightened and that the tank is firmly mounted to the roof rack.

4.2 Preparation for use

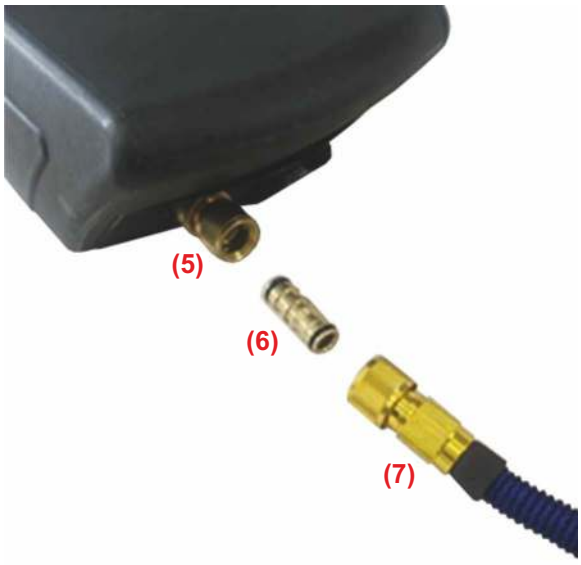

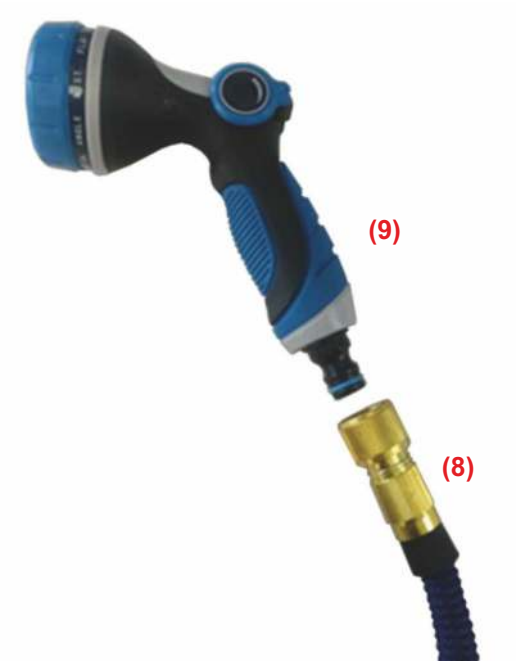

1. Open the tank's filler cap and fill the tank with water. After filling, securely screw the filler cap back in place. The water in the tank should be replaced periodically, at least every 2 weeks.

2. Pull back the quick-connect lock on the tank's water outlet (5), insert the adapter (6) into the outlet, and release the lock.

3. Pull back the quick-connect lock on the shower hose (7) and slide the hose onto the adapter (6). Release the hose lock.

4. Pull back the quick-connect lock on the other end of the hose (8) and attach it to the shower head (9). Release the lock.

5. Ensure that all components are securely connected.

6. Connect the tank to a power source using the supplied 12V DC cable. Turn on the power by switching the power switch to position „I".

7. Push the lever on the shower head forward to check the system for leaks.

8. Turn off the power by switching the switch to the "O" position.

Note! When the vehicle is parked on an incline, position the water outlet downward to allow the tank to be completely emptied.

4. Installation and operation cont.

4.3 Adjusting the water flow pressure

Caution! Do not direct a high-pressure stream toward the face, other sensitive body parts, or objects susceptible to mechanical damage.
• To increase the water flow pressure, push the lever on the shower head forward.


• To decrease the water flow pressure, pull the lever on the shower head backward.





4.4 Shower Head Functions

The shower head offers ten water spray modes, which can be changed by rotating the nozzle ring.

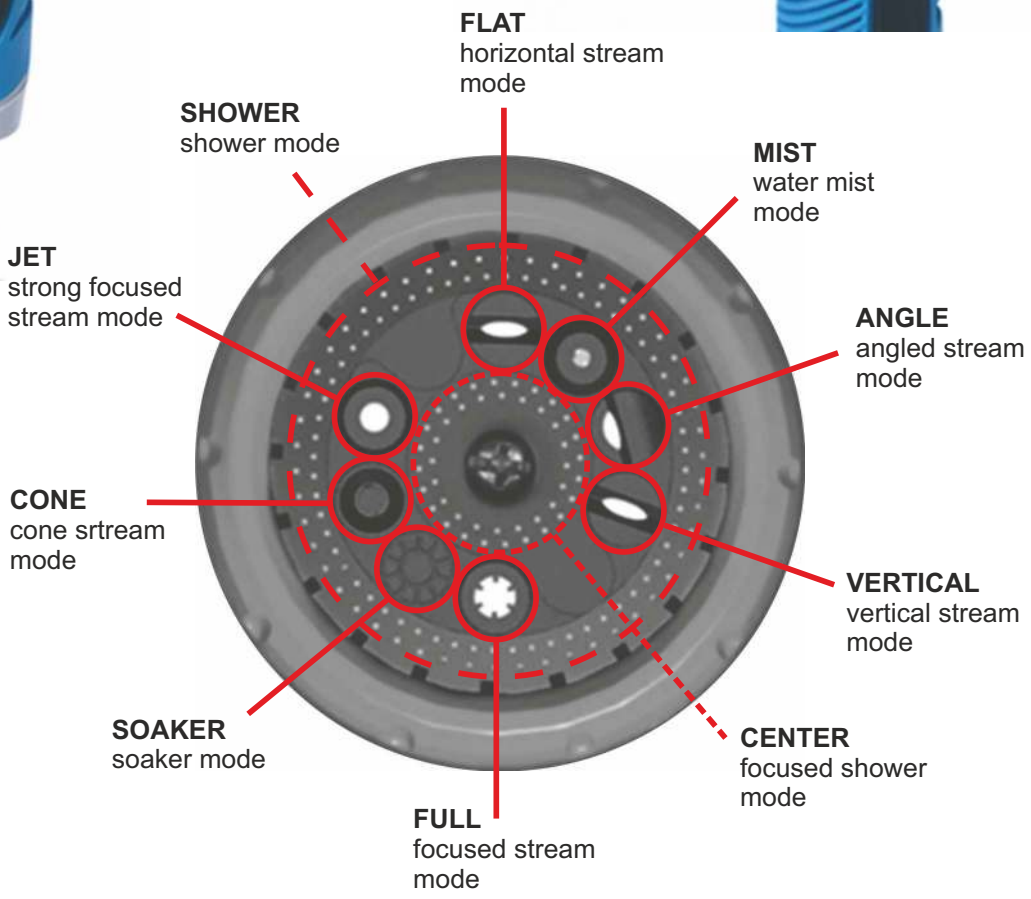

5. Cleaning and maintenance

5.1 Cleaning

Caution! Disconnect the tank from the power supply before cleaning.

• Clean the exterior surface of the tank, excluding the power socket and switch, with a soft, damp cloth.

• Rinse the inside of the tank with clean water.

• Do not use aggressive detergents, abrasive agents, or solvents. Mild soap added to water is recommended.

• Do not immerse the tank in water or clean it with a pressure washer.

• Remove the product before using an automatic car wash.

5.2 Maintenance

• After each use, it is recommended to remove the tank and completely drain any remaining water. To remove residual water, fully unscrew the drain screw located at the lower front part of the tank using a hex key of the appropriate size.



Then, clean the tank and allow it to dry completely. Keep the water inlet and outlet openings open.
• Store the unused tank in a dry, clean place, protected from moisture, frost, and direct sunlight.

6. Technical specifications

• Tank capacity: 30 L
• Tank dimensions (L × W × H): 1620 × 220 × 160 mm
• Rated voltage: DC 12 V
• Rated current: 2.5 A
• Distance between roof rack crossbars: 700 – 1000 mm
• Width of roof rack crossbars: 30 – 90 mm
• Maximum water pressure: 50 PSI / 3.45 bar
• Maximum water flow: 4.5 L/min
• Shower hose length: 2.5 – 7.5 m
• Power cable length: 3.7 m
• Net weight: 10.5 kg
• Material: HDPE, ABS

Manufacturer:
ARKAS Sp. z o.o.
ul. Kuziennicza 4,
59-400 Jawor, Polska
www.yolco.pl
www.yolco.de

Follow us on

65/IUS/26

The crossed out wheeled bin symbol means that this product should not be disposed of with other household waste. Waste electrical and electronic equipment should be sent for recycling and recycling with environmental protection regulations in force in a given country regarding waste management. Selective waste collection contributes to reducing their potential negative impact on human health and the resulting environment from the presence in the equipment of dangerous substances, mixtures and components.